

CABLE PROTECTORS

Cable protectors of penta-treated wood, copper pipe, polyvinylchloride (PVC) pipe. For guarding cable near ground from mechanical damage. Install one foot below grade to 6' or more above grade.

COPPER PIPE — 6'-8"

Cat. No. C93A — 5/8" I.D. x long

Cat. No. C93B — 3/4" I.D. x long

Cat. No. C93C — 1" I.D. x long

Cat. No. C93D — 1-1/4" I.D. x long


PVC PIPE

Cat. No. 93A — 1/2" I.D. x 10' long

Cat. No. 93B — 3/4" I.D. x 10' long


Cat. No. 93C — 1" I.D. x 10' long

Cat. No. 93D — 1-1/4" I.D. x 10' long

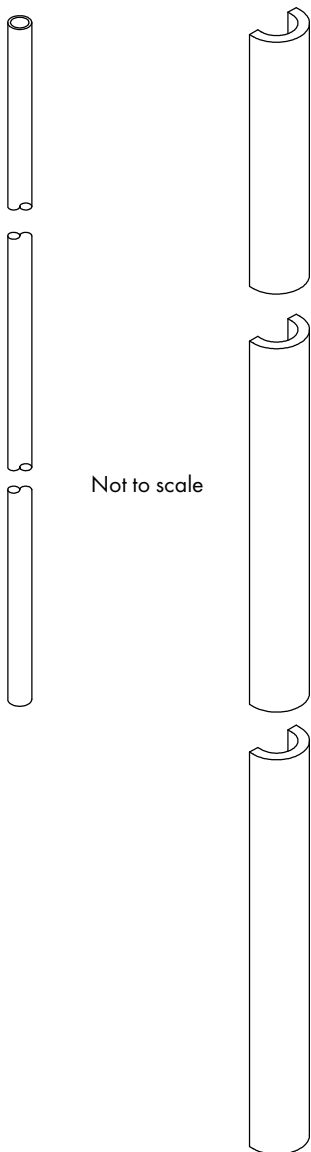

WOOD

Cat. No. 96 — 8' long for cables to 3/4" diameter

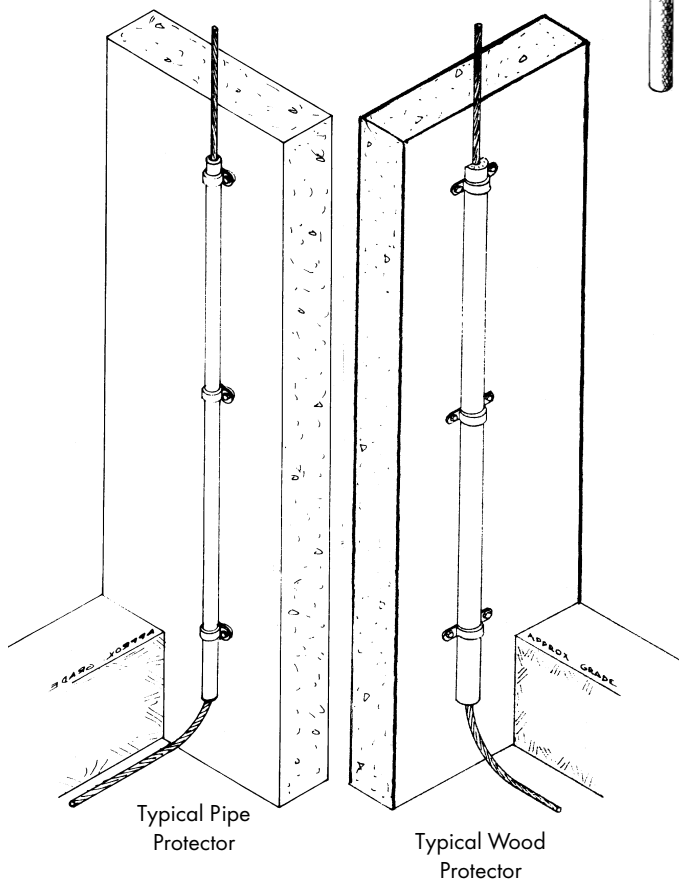

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440



FASTENERS FOR PROTECTORS

ALL ITEMS




WOOD PROTECTOR STRAP

Heavy galvanized steel strap formed to fit tight on Cat. No. 96 wood molding protector – available as strap only to be used with nails, wood screws or metal screws or with screws and expansion anchors for masonry.

Copper

Cat. No. 71M – Strap Only

Cat. No. 71G – Strap with masonry anchors

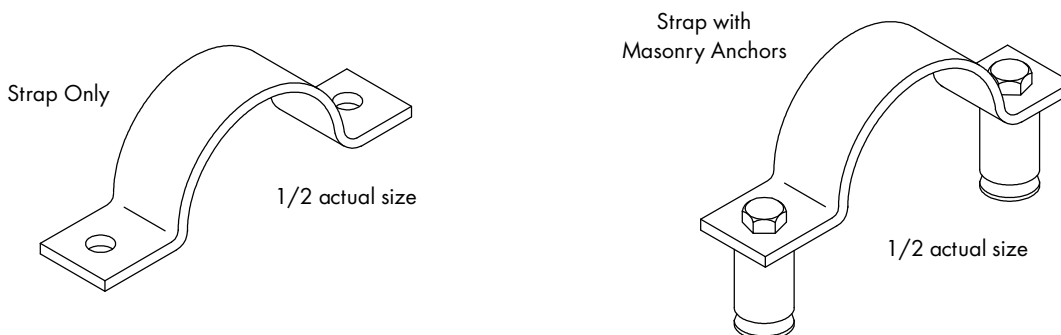

PIPE PROTECTOR STRAP (TWO BOLT)

Heavy copper strap 1" wide of 0.064" thick metal formed to fit metal pipe or PVC pipe protectors – holes punched to receive bolts, screws, or nails to 1/4" diameter.

Copper


Cat. No. 71B-1 – for 1/2" PVC cable protector #93D

Cat. No. 71B-5 – for 5/8" copper cable protector #93A

Cat. No. 71B-3 – for 3/4" PVC cable protector #93E

Cat. No. 71B-4 – 1" Diameter

Cat. No. 71B-6 – 1-1/4" Diameter

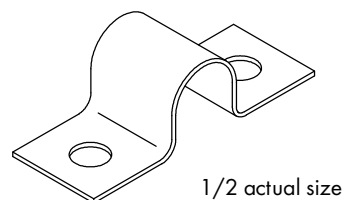

PIPE PROTECTOR LOOP (ONE BOLT)

Heavy copper loop 1" wide of 0.064" thick metal formed to fit metal pipe or PVC pipe protectors – hole punched to receive bolt to 1/4" diameter.

Copper


Cat. No. 71-1 – for 1/2" PVC cable protector #93D

Cat. No. 71-5 – for 5/8" copper cable protector #93A

Cat. No. 71-3 – for 3/4" PVC cable protector #93E

Cat. No. 71-4 – 1" Diameter

Cat. No. 71-6 – 1-1/4" Diameter



ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440



LEAD TUBING AND WEDGES

LEAD TUBING

Pure lead tubing for use in covering copper or aluminum cable or points to prevent contact with dissimilar metals or to prevent corrosion from nearby acids – may be field swaged to point for use on copper points – wall 1/16" thick – each size listed is oversize to slip over exact diameter of point or cable. Maximum length is 120".

- Cat. No. 460** – 3/8" Inside Diameter
- Cat. No. 460A** – 1/2" Inside Diameter
- Cat. No. 460B** – 5/8" Inside Diameter
- Cat. No. 460C** – 3/4" Inside Diameter

1/2 actual size




LEAD WEDGE

Combination lead and tin wedge to be used in tubing or pipe to wedge cable against wall for making cable electrically continuous with metal at top and bottom of protector pipe or conduit run – each wedge is 1" long – available in size ranges for cables 3/8" to 1/2" diameter.

- Cat. No. 461** – for 1/2" conduit or pipe
- Cat. No. 461A** – for 3/4" conduit or pipe
- Cat. No. 461B** – for 1" conduit or pipe

Typical use
in pipe end



1/2 actual size



ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

