

PIPE BONDING STRAP



Adjustable strap-type pipe bonding assembly – consists of tinned copper or bare aluminum strap 1" wide – copper 0.064" thick; aluminum 0.080" thick – with No. 52S or No. A52S universal cable connector – for main sized cables through No. 605 – 1/4" x 1" take-up bolt with nut. Standard sizes shown – other sizes available on request. For main sized cables. Shipped flat, to be formed at the jobsite for exact pipe size.

Copper

Cat. No. 677D-4 – for 2" through 4" pipe - 12.8 oz.

Cat. No. 677D-6 – for 4-1/2" through 6" pipe - 14.2 oz.


Cat. No. 677D-8 – for 6-1/2" through 8" pipe - 1 lb. - 1 oz.

Aluminum


Cat. No. A677D-4 – for 2" through 4" pipe - 6.1 oz.

Cat. No. A677D-6 – for 4-1/2" through 6" pipe - 7 oz.

Cat. No. A677D-8 – for 6-1/2" through 8" pipe - 8 oz.

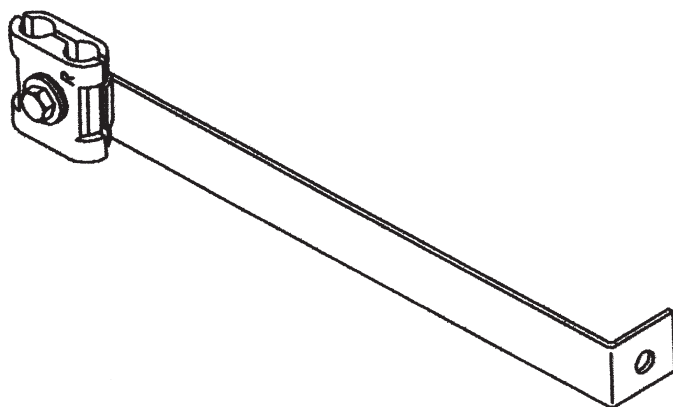

Typical use on
vertical pipe



ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

