


EXTRA FLEXIBLE BRAID CONDUCTORS

(For use in Bonding and Grounding of Moving or Vibrating Machinery, Equipment, Doors, Platforms and Cover Plates.)

Multiple stranded conductors allow maximum flexibility and extended life over standard cables.

Flexible braid conductors are available in cut lengths with one-hole flat lug on each end. Standard lengths shown – other lengths available on request.

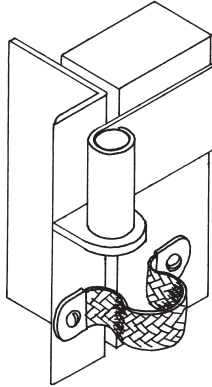

Typical use
on door hinge

Cat. No. 607 – Tinned copper flexible strap of 1/8" thick by 15/16" wide multi-strand braid (#2 AWG) with flat lug on each end. Holes to fit 1/4" diameter bolt or screw, 10" on centers. 3.4 oz.

Cat. No. 607A – Tinned copper flexible strap of 1/8" thick by 15/16" wide multi-strand braid (#2 AWG) with flat lug on each end. Holes to fit 1/4" diameter bolt or screw, 12" on centers. 3.8 oz.

Cat. No. 607B – Tinned copper flexible strap of 1/8" thick by 15/16" wide multi-strand braid (#2 AWG) with flat lug on each end. Holes to fit 1/4" diameter bolt or screw, 16" on centers. 5 oz.

Cat. No. 607C – Tinned copper flexible strap of 1/8" thick by 15/16" wide multi-strand braid (#2 AWG) with flat lug on each end. Holes to fit 1/4" diameter bolt or screw, 24" on centers. 7.5 oz.



EXTRA FLEXIBLE BRAID CONDUCTORS (Bulk Coils or Reels)

(For use in Bonding and Grounding of Moving or Vibrating Machinery, Equipment, Doors, Platforms and Cover Plates.)

Multiple stranded conductors allow maximum flexibility and extended life over standard cables. Flexible braid conductors are available in bulk coils up to 500' long or in cut lengths.



Cat. No. 840 – Tinned copper flexible multi-strand braid, 1/8" thick by 1-1/4" wide (#1/0 AWG). Weight of copper – 355 pounds per 1,000'.

Cat. No. 842 – Tinned copper flexible multi-strand braid, 1/8" thick by 15/16" wide (#2 AWG). Weight of copper – 220 pounds per 1,000'.

Cat. No. 844 – Tinned copper flexible multi-strand braid, 3/32" thick by 1" wide (#4 AWG). Weight of copper – 130 pounds per 1,000'.

Cat. No. 846 – Tinned copper flexible multi-strand braid, 3/32" thick by 1/2" wide (#6 AWG). Weight of copper – 80 pounds per 1,000'.

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

