


COPPER BUS BAR

RAW BAR

High conductivity copper bus bar – hard drawn for use with minimum support – may be formed cold or with little heat – available in standard mil lengths of 12 feet or less. Copper conductivity 100%. 2 mounting holes std.

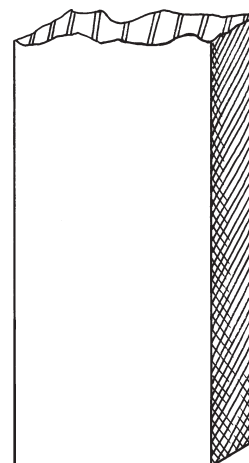

- Cat. No. 608** – 1/16" thick, 1" wide - 3.9 oz./ft.
- Cat. No. 609** – 1/8" thick, 1" wide - 7.8 oz./ft.
- Cat. No. 609A** – 1/8" thick, 3/4" wide - 5.8 oz./ft.
- Cat. No. 609B** – 1/8" thick, 1-1/2" wide - 11.6 oz./ft.
- Cat. No. 609C** – 1/8" thick, 2" wide - 15.5 oz./ft.
- Cat. No. 610** – 1/4" thick, 1" wide - 15.5 oz./ft.
- Cat. No. 610A** – 1/4" thick, 3/4" wide - 11.6 oz./ft.
- Cat. No. 610B** – 1/4" thick, 1-1/2" wide - 1 lb. - 7 oz./ft.
- Cat. No. 610C** – 1/4" thick, 2" wide - 1 lb. - 15 oz./ft.
- Cat. No. 610D** – 1/4" thick, 3" wide - 2 lbs. - 15 oz./ft.
- Cat. No. 610E** – 1/4" thick, 4" wide - 3 lbs. - 14 oz./ft.
- Cat. No. 610F** – 1/4" thick, 6" wide - 5 lbs. - 13 oz./ft.
- Cat. No. 610G** – 1/4" thick, 8" wide - 7 lbs. - 12 oz./ft.

STANDARD DRILL

2 Holes for 3/8" clearance - Up to 24" long

3 Holes for 3/8" clearance - Up to 36" long

4 Holes for 3/8" clearance - Up to 48" long



COPPER BUS BAR W/MOUNTING KIT

- Cat. No. CB-A-12** – 1/4" x 1" x 12" - 1 lb. - 8 oz.
- Cat. No. CB-A-24** – 1/4" x 1" x 24" - 2 lbs. - 7 oz.
- Cat. No. CB-A-36** – 1/4" x 1" x 36" - 3 lbs. - 7 oz.
- Cat. No. CB-A-48** – 1/4" x 1" x 48" - 4 lbs. - 6 oz.

- Cat. No. CB-C-12** – 1/4" x 2" x 12" - 2 lbs. - 7 oz.
- Cat. No. CB-C-24** – 1/4" x 2" x 24" - 4 lbs. - 6 oz.
- Cat. No. CB-C-36** – 1/4" x 2" x 36" - 6 lbs. - 5 oz.
- Cat. No. CB-C-48** – 1/4" x 2" x 48" - 8 lbs. - 4 oz.

- Cat. No. CB-E-12** – 1/4" x 4" x 12" - 4 lbs. - 6 oz.
- Cat. No. CB-E-24** – 1/4" x 4" x 24" - 8 lbs. - 4 oz.
- Cat. No. CB-E-36** – 1/4" x 4" x 36" - 12 lbs. - 2 oz.
- Cat. No. CB-E-48** – 1/4" x 4" x 48" - 16 lbs.

NOTE: Special ground bars can be fabricated from standard bus bar stock with any combination of holes drilled or drilled and tapped.

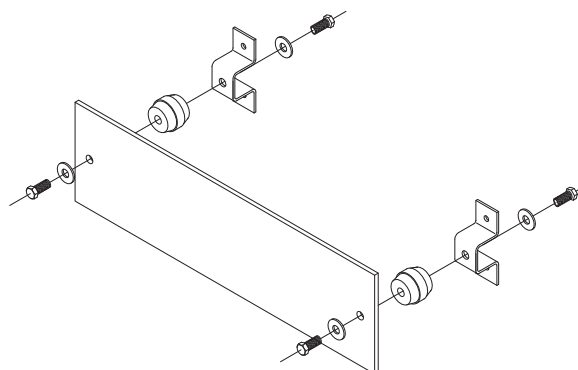

Shown with optional mounting holes and lug.

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

