


BUS BAR ACCESSORIES

STAND-OFF INSULATORS

Insulator of reinforced polyester for use in mounting bus bar away from wall to allow clamping or bolting of lugs and terminals to bar – 3/8" threaded inserts – maximum stand-off 4" recommended.

Cat. No. 619 – 1-1/2" high, 1-3/4" diameter - 3.8 oz.

Cat. No. 619A – 2" high, 1-3/4" diameter - 5.8 oz.



Other sizes available upon request.


STAND-OFF BRACKETS

Bracket made of 1/8" thick by 1" wide stainless steel stock for mounting bus bar away from wall to allow clamping or bolting of lugs and terminals to bar – 3/8" holes for mounting with screws or masonry anchors. Stand-off distance 1-1/2" – ears 1" wide. May be used alone or with insulator.

Cat. No. 469 - 2.9 oz.

Cat. No. 469-4 - 3.4 oz.

Same as above except 4" across top, for mounting 4" wide bus bar.




Other sizes available on special order.

BUS NAME PLATES

Clear acrylic nameplate for mounting on bus bars. Specify size and message when ordering.

Cat. No. COV

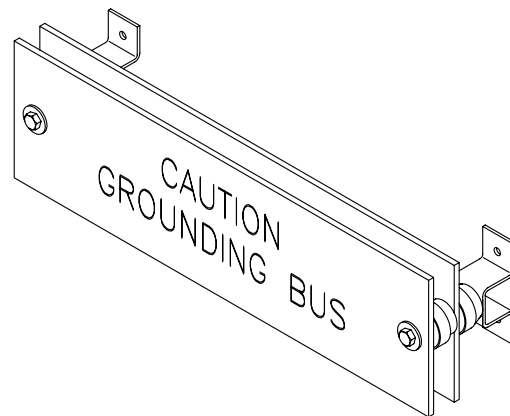

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

