

BONDING LUG





MINIATURE BONDING LUG (HEAVY DUTY)

Heavy cast copper or aluminum bonding lug for flat metal surface – 1-1/2 square inch contact surface – cable contact 1-1/4" long with two 1/4" bolt pressure on cable – will take all secondary cables, wires and miniature cables through 1/4" diameter – 1/4" bolt hole in lug end. Overall dimensions - 2-3/4" x 3/4".


Cat. No. 655 – Copper - 3.2 oz.

Cat. No. 655BM – Bimetallic - 3.2 oz.

Cat. No. A655 – Aluminum - 1.2 oz.

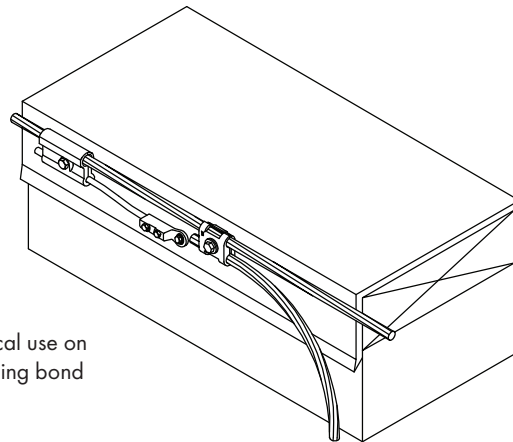

Typical use on
flashing bond

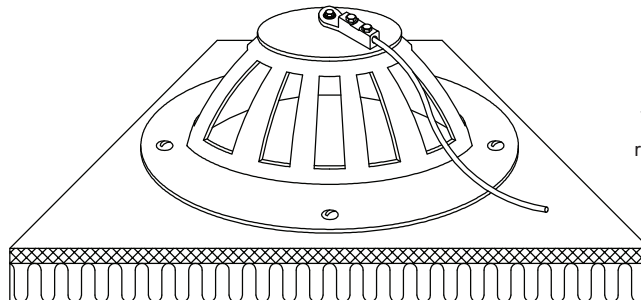

Typical use on
roof drain bond



ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440