

## PVC GROUND ACCESS WELLS

Ground Access Wells of Schedule 40  
PVC – 1/4" thick galvanized steel lid.

**Cat. No. 89A-18** – 6" I.D. x 18" long - 10 lbs. - 9 oz.

**Cat. No. 89A-24** – 6" I.D. x 24" long - 12 lbs. - 3 oz.

**Cat. No. 89A-36** – 6" I.D. x 36" long - 16 lbs. - 3 oz.

**Cat. No. 89B-18** – 8" I.D. x 18" long - 16 lbs. - 6 oz.

**Cat. No. 89B-24** – 8" I.D. x 24" long - 19 lbs. - 6 oz.

**Cat. No. 89B-36** – 8" I.D. x 36" long - 25 lbs. - 6 oz.

**Cat. No. 89C-18** – 10" I.D. x 18" long - 25 lbs.



**Cat. No. 89C-24** – 10" I.D. x 24" long - 29 lbs. - 1 oz.

**Cat. No. 89C-36** – 10" I.D. x 36" long - 36 lbs. - 13 oz.

**Cat. No. 89D-18** – 12" I.D. x 18" long - 33 lbs. - 15 oz.

**Cat. No. 89D-24** – 12" I.D. x 24" long - 39 lbs.

**Cat. No. 89D-36** – 12" I.D. x 36" long - 48 lbs. - 6 oz.

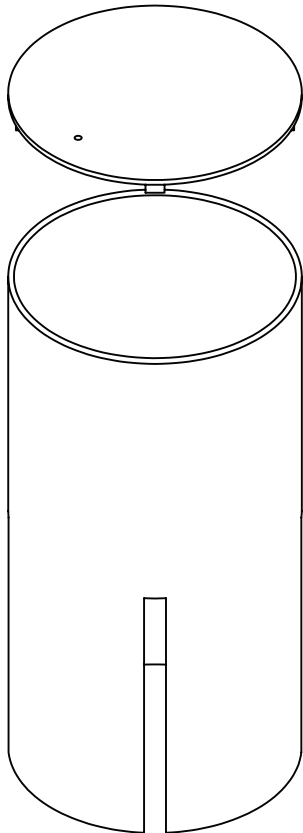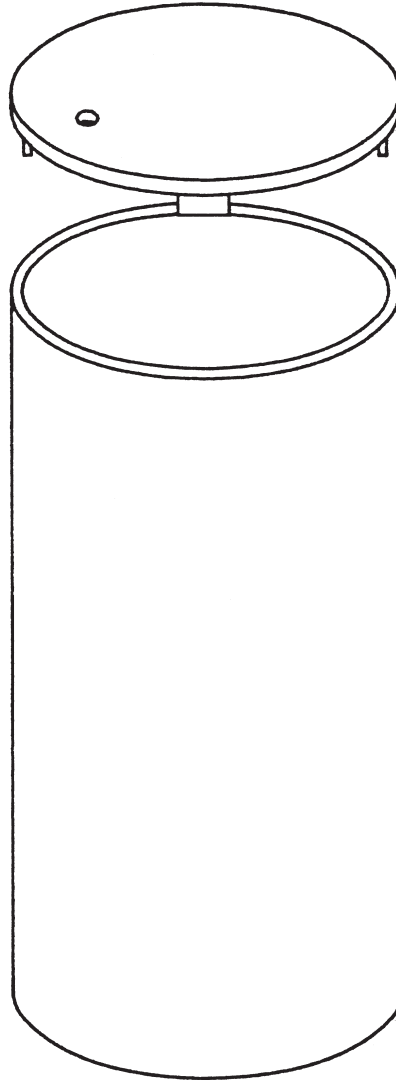

Optional configuration includes 4 slots, equally spaced, 15/16" wide, 1/2 the total length of the ground well. Custom sizes and configurations available upon request.

# ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

-125-

