

# ALUMINUM POINTS — STANDARD

ALL ITEMS



Aluminum points made from solid rod, drawn to a sharp point, threaded to fit bases. Specify thread size when ordering. Shipped with 1/2" threads for use on Class I systems, or 5/8" threads for use on Class II systems.



Standard sizes available from stock:

- |                        |   |
|------------------------|---|
| <b>Cat. No. A25</b>    | – 1/2" diameter x 10" long - 2.7 oz.        |
| <b>Cat. No. A24</b>    | – 1/2" diameter x 12" long - 3.3 oz.        |
| <b>Cat. No. A23</b>    | – 1/2" diameter x 15" long - 4.2 oz.        |
| <b>Cat. No. A22</b>    | – 1/2" diameter x 18" long - 5.1 oz.        |
| <b>Cat. No. A21A</b>   | – 1/2" diameter x 24" long - 7 oz.          |
| <b>Cat. No. A20A</b>   | – 1/2" diameter x 30" long - 8.8 oz.        |
| <b>Cat. No. A19A36</b> | – 1/2" diameter x 36" long - 10.6 oz.       |
| <b>Cat. No. A19A48</b> | – 1/2" diameter x 48" long - 14.3 oz.       |
| <b>Cat. No. A19A60</b> | – 1/2" diameter x 60" long - 1 lbs. - 2 oz. |
|                        |   |
| <b>Cat. No. A25B</b>   | – 5/8" diameter x 10" long - 4.8 oz.        |
| <b>Cat. No. A24B</b>   | – 5/8" diameter x 12" long - 5.7 oz.        |
| <b>Cat. No. A23B</b>   | – 5/8" diameter x 15" long - 7.1 oz.        |
| <b>Cat. No. A22B</b>   | – 5/8" diameter x 18" long - 8.6 oz.        |
| <b>Cat. No. A21C</b>   | – 5/8" diameter x 24" long - 11.4 oz.       |
| <b>Cat. No. A20C</b>   | – 5/8" diameter x 30" long - 14.3 oz.       |
| <b>Cat. No. A19C36</b> | – 5/8" diameter x 36" long - 1 lb. - 1 oz.  |
| <b>Cat. No. A19C48</b> | – 5/8" diameter x 48" long - 1 lb. - 7 oz.  |
| <b>Cat. No. A19C60</b> | – 5/8" diameter x 60" long - 1 lb. - 13 oz. |




Points also available with blunt tips.  
(Add -BT to part numbers shown.)  
Add 0.4 oz. for 1/2"  
Add 0.5 oz. for 5/8"

## SPECIAL POINT INFORMATION

The above listed points are carried in stock for immediate shipment — other points of special lengths and diameters are available, including 3/4" and 1" diameters.

Lengths over 144" are made by coupling an extension rod to points listed above. Extension rods available in 1/2", 5/8", 3/4" and 1" diameters and lengths up to 144".

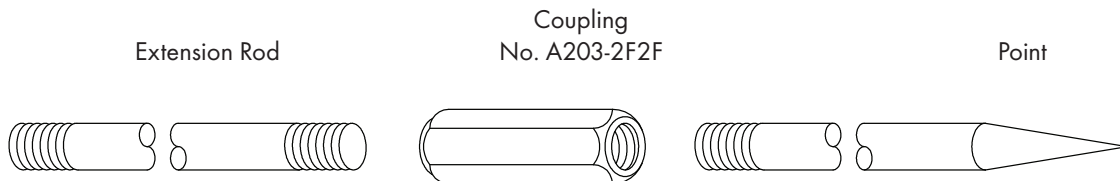

NOTE: Spring Point Assemblies also available — see page 17.

# ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

