

STANDARD CONCEALED POINTS



Concealed Point Assembly of bare copper or aluminum. Consists of 10" point length with balance threaded for roof insert. Nuts and washers draw tight to prevent leak. Base No. 42AN for horizontal and vertical direction of cable run. Available in nickel plated copper on request (Add -NP to copper part numbers shown). For use with main sized cables.

Copper

- Cat. No. 34-18** – 1/2" diameter x 18" long - 1lb. - 10 oz.
- Cat. No. 34-24** – 1/2" diameter x 24" long - 1lb. - 14 oz.
- Cat. No. 34-30** – 1/2" diameter x 30" long - 2 lbs. - 3 oz.


- Cat. No. 34A-18** – 3/8" diameter x 18" long - 1lb. - 3 oz.
- Cat. No. 34A-24** – 3/8" diameter x 24" long - 1lb. - 5 oz.
- Cat. No. 34A-30** – 3/8" diameter x 30" long - 1lb. - 9 oz.

- Cat. No. 34B-18** – 5/8" diameter x 18" long - 2 lbs. - 8 oz.
- Cat. No. 34B-24** – 5/8" diameter x 24" long - 3 lbs. - 2 oz.
- Cat. No. 34B-30** – 5/8" diameter x 30" long - 3 lbs. - 12 oz.


Aluminum

- Cat. No. A34-18** – 1/2" diameter x 18" long - 9.4 oz.
- Cat. No. A34-24** – 1/2" diameter x 24" long - 11 oz.
- Cat. No. A34-30** – 1/2" diameter x 30" long - 12.6 oz.

- Cat. No. A34B-18** – 5/8" diameter x 18" long - 14.7 oz.
- Cat. No. A34B-24** – 5/8" diameter x 24" long - 1 lb. - 2 oz.
- Cat. No. A34B-30** – 5/8" diameter x 30" long - 1 lb. - 4 oz.

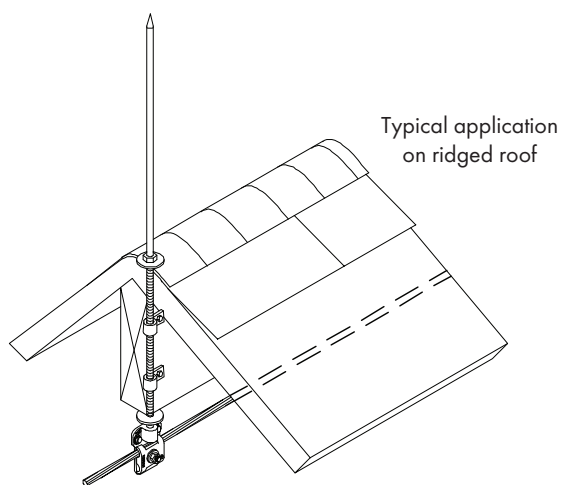

Typical application
on ridged roof



Points also available
with blunt tips.
(Add -BT to part
numbers shown.)

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440