

SPECIAL POINTS

TUBULAR POINT WITH TEE POINT BASE

Tubular copper or aluminum point with tee point base securely clamped to lower end with crimp fitting for cable attachments — copper points bright nickel tipped.



Copper - 5/8" diameter x 0.032" thick

Cat. No. 19 – 36" - 11b.

Cat. No. 20 – 30" - 13.6 oz.

Cat. No. 21 – 24" - 11.3 oz.

Aluminum - 0.84" diameter x 0.109" thick

Cat. No. A19 – 36" - 5.7 oz.

Cat. No. A20 – 30" - 5 oz.



Cat. No. A21 – 24" - 4.3 oz.

TUBULAR POINT BASE

Stamped copper or aluminum point base for use with tubular points. Copper base 0.064" thick - aluminum base - 0.100" thick. Overall dimensions - 2 - 1/4" x 3"

Cat. No. 202 – Copper - 2 oz.

Cat. No. A202 – Aluminum - 1.3 oz.

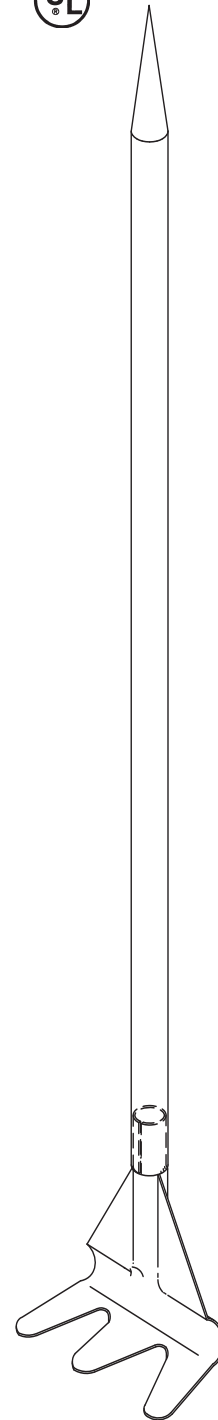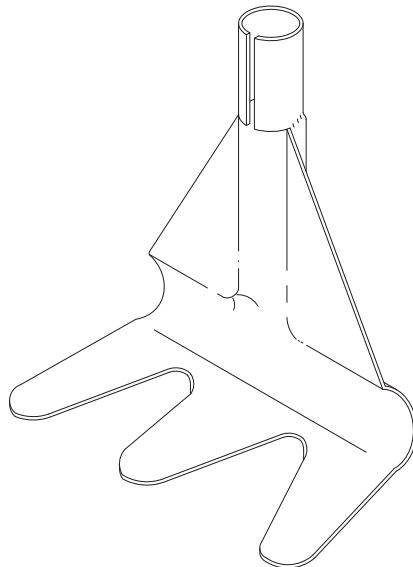

ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440