



## THRU-ROOF POINT ADAPTERS


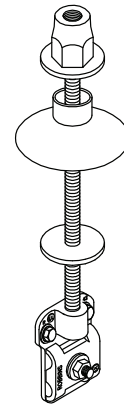


Combination connector used for thru-roof air terminal penetration – draws tight to top and bottom of composition or metal roof surfaces. Point adapter nut No. 803 or No. A803 at top along with neoprene washers and cast bronze or aluminum flashing cone No. 100 or No. A100 to provide a moisture seal. Your choice of No. 42AN or No. A42AN tee connector or No. 55D or No. A55D clamp for bottom end (either fits all main cables through 9/16" diameter). For copper-to-copper connection, all components are copper or bronze except nuts and washers which are stainless steel – for copper-to-aluminum or aluminum-to-aluminum connection, the threaded rod, nuts and washers are stainless steel. Threaded rod 1/2" diameter, standard length 24" – other lengths available upon request.

- Cat. No. 742CPCT** – Copper Point to Copper  
Tee Connector - 3 lbs. - 1 oz.
- Cat. No. 742APCT** – Aluminum Point to Copper  
Tee Connector - 3 lbs. - 0 oz.
- Cat. No. 742APAT** – Aluminum Point to Aluminum  
Tee Connector - 2 lbs. - 6 oz.

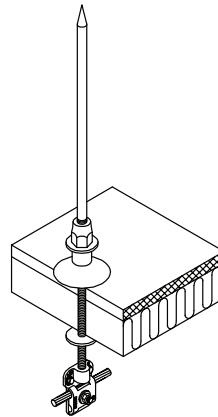

- Cat. No. 742CPCD** – Copper Point to Copper  
Clamp - 2 lbs. - 4 oz.
- Cat. No. 742APCD** – Aluminum Point to Copper  
Clamp - 1 lb. - 13 oz.
- Cat. No. 742APAD** – Aluminum Point to Aluminum  
Clamp - 1 lb. - 11 oz.

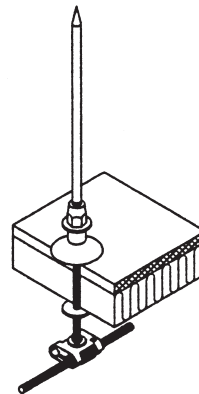

Other combination of parts can be made as needed.

Refer to connectors and letter codes as shown on page 62.

# ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

