


# THRU-ROOF CABLE CONNECTORS




Combination connector for thru-roof cable penetration – draws tight to top and bottom of composition or metal roof surface. Neoprene washers and a cast bronze or aluminum flashing cone provide a moisture seal. Cable clamp No. 55D or No. A55D, lug No. 55B or No. A55B, or tee connector No. 42AN or No. A42AN furnished for either end (any of these connectors fits main sized cables through 9/16" diameter). For copper-to-copper connection, all components are copper or bronze except nuts and washer which are stainless steel – for copper-to-aluminum or aluminum-to-aluminum connection, the threaded rod, nuts and washers are stainless steel. Threaded rod 1/2" diameter, standard length 24" – other lengths available upon request.



- Cat. No. 743CDCD** – Copper Clamp to Copper Clamp - 2 lbs. - 9 oz.
- Cat. No. 743ADCD** – Aluminum Clamp to Copper Clamp - 1lb. - 15 oz.
- Cat. No. 743ADAD** – Aluminum Clamp to Aluminum Clamp - 1lb. - 11 oz.

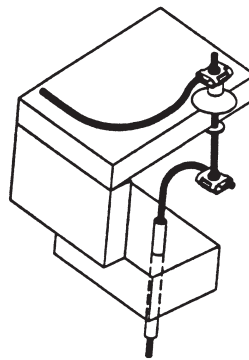


- Cat. No. 743CDCT** – Copper Clamp to Copper Tee Connector - 3 lbs. - 5 oz.
- Cat. No. 743ADCT** – Aluminum Clamp to Copper Tee Connector - 3 lbs. - 1 oz.
- Cat. No. 743ADAT** – Aluminum Clamp to Aluminum Tee Connector - 2lbs. - 11 oz.

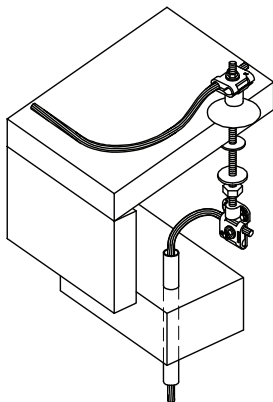

Other combination of parts  
can be made as needed.

Refer to connectors and letter codes  
as shown on page 62.

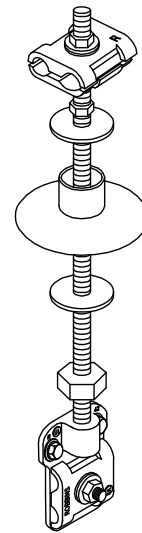

# ROBBINS LIGHTNING, INC.

124 EAST SECOND STREET PHONE (660) 582-3156 FAX (660) 582-3039 P.O. BOX 440 MARYVILLE, MISSOURI 64468-0440

